

INSTALLATION INSTRUCTIONS

For Model 72416-51A-L

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

CONNECTING THE WIRES (Fig. 2)

3. While supporting the fixture, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post cup (X).
4. Align the fixture to post (X) and secure with screws (H).
5. Bulb (G) information: (1 x AC LED 10W included.)
DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

COMPLETING THE INSTALLATION (Fig. 1)

6. Remove top cover (A) by loosening screws (B).
7. Place the small round glass (F) over LED module (O).
8. Re-attach top cover (A) with screws (B).

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

1. Remove top cover (A) by loosening screws (B).
- a. Remove the small round glass (F) followed by clear seeded glass (E) and cage (D) by loosening screws (K).
- b. Remove wire nuts (L) and loosen module screws (H).
- c. Carefully remove the LED module (Q) for re-lamping. Note: The LED module should be provided by a specified supplier.
- d. For better heat dissipation the LED module (Q) should be installed with the heat transfer material (P) when re-lamping

Your installation is now complete. Return power to the junction box and test the fixture

Fig.1

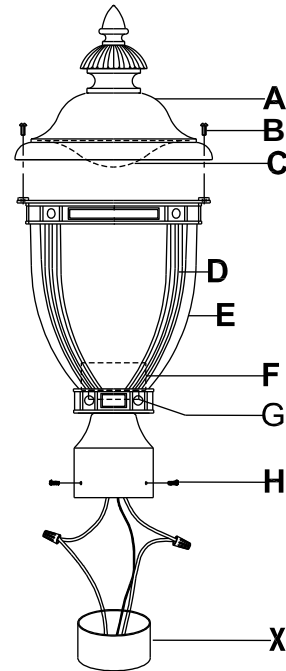


Fig. 2

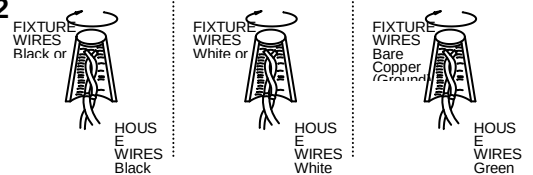


Fig.3

